



Wrapid Sleeve™

One-piece protective sleeve with pre-attached closure

Canusa-CPS is a leading manufacturer of specialty pipeline coatings which, for over 30 years, have been used for sealing and corrosion protection of pipeline joints and other substrates. Canusa high performance products are manufactured to the highest quality standards and are available in a number of configurations to accommodate your specific project applications.

Product Description

The Canusa Wrapid Sleeve™ is a one-piece wraparound sleeve designed for corrosion protection of buried and exposed steel pipelines. Wrapid Sleeve™ consists of a crosslinked polyolefin backing, coated with a protective heat sensitive adhesive which effectively bonds to steel substrates and common pipeline coatings including polyethylene and fusion bonded epoxy.


Features & Benefits

Rapid & Reliable Installation

Wrapid Sleeve™ has a patented one-piece construction that incorporates a pre-attached closure strip as part of the sleeve. Because the closure has been factory applied, quick and reliable field installation is easy to accomplish. Wrapid Sleeve™ is also available with a broad range of adhesives to accommodate various operating temperatures and soil stress conditions. To further optimize installation, Wrapid Sleeve™ products are available with a yellow polyethylene backing that incorporates a thermochromic indicator. These sleeves can be supplied with either a yellow or a patented opaque Windoweld™ closure.

Long-Term Corrosion Protection

Wrapid Sleeve™ provides excellent resistance to cathodic disbondment resulting in effective long term corrosion

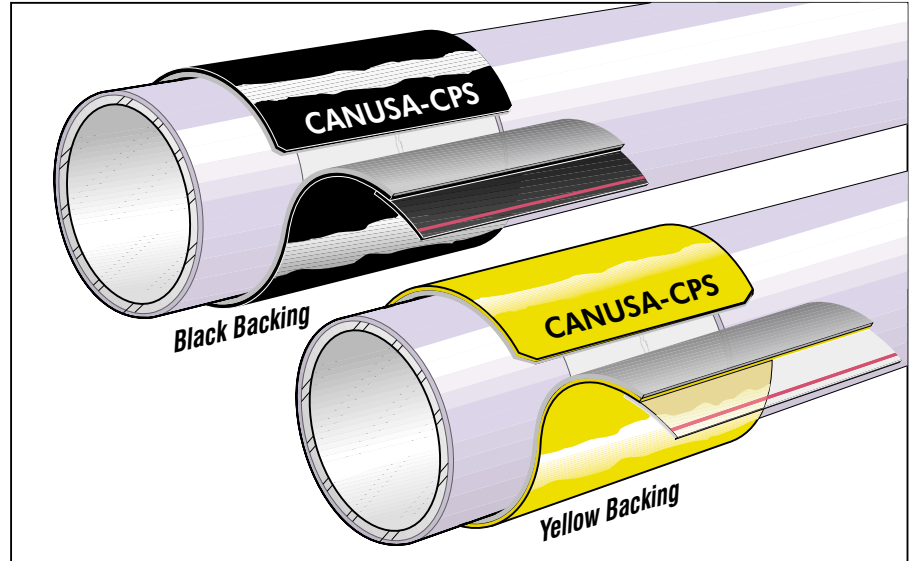

protection. The high performance crosslinked backing, in combination with a broad range of adhesives, can be engineered for regular or high stress environments. Once installed, Wrapid Sleeve™ provides the structural integrity of a seamless tube, and provides the substrate with durable protection against abrasion and chemical attack.

Saves Time & Money

With Wrapid Sleeve's™ unique construction, less time is required handling, positioning and installing separate closures. With the application of heat, this feature allows for fast, simple and complete installation of the sleeve. No additional costly primers are required. This minimizes installation time and labour costs while promoting high production rates. Wrapid Sleeve™ is also available in a high shrink ratio for high profile joint protection. Consult the High Shrink data sheet for additional information.

Applications



Oil & Gas



Offshore Pipelines



Polypropylene



Water Pipelines



Pre-Insulated Pipes



Girth-Weld Joints

Configurations



Wrapid Sleeve™



2-Layer



Standard Shrink

Pipe Sizes



55 - 1520 (2" - 60")

Temperature Range



Up to 80°C (176°F)

Wrapid Sleeve™

Product Selection Guide

Choose your sleeve based on Operating Temperature and Characteristics listed below.

Sleeve Operating Characteristics	Celsius Fahrenheit		Mastic Adhesives						Hot Melt Adhesives	
			KLK KTG	KLC KTC	KLS KTS	KLO KTO	KLON KTON	KLNN KTNN	KLA	KLAS
Pipeline Operating Temperature	110°	230°								
	90°	194°								
	70°	158°								
	50°	122°								
	30°	86°								
Minimum Installation Temperature	°C (°F)		50 (122)	60 (140)	65 (150)	75 (167)	75 (167)	90 (195)	60 (140)	90 (195)
Resistance to Circumferential Forces			fair	fair	good	good	good	good	v. good	excl
Resistance to Soil Stress			fair	fair	good	good	good	good	v. good	excl
Resistance to Axial Pipe Movement			fair	fair	good	good	good	good	v. good	excl
Main Line Coating Compatibility			← PE, PP, FBE, PU, Coal tar, Bitumen, →						PE, PP, FBE	

* For higher temperature requirements refer to Canusa GTS product line.

Typical Product Properties

Adhesive	Test Standard Unit											
Softening Point	ASTM E28	°C (°F)		100 (212)	90 (194)	77 (171)	102 (216)	102 (216)	124 (255)		72 (162)	90 (194)
Lap Shear	DIN 30 672 M	N/cm ² (psi)		8 (12)	30 (44)	40 (58)	40 (58)	40 (58)	52 (75)		60 (87)	117 (170)
Backing	Specific Gravity	ASTM D792		.93	.93	.93	.93	.95	.95		.93	.93
	Tensile Strength	ASTM D638	MPa (psi)	20 (2900)	20 (2900)	20 (2900)	24 (3480)	24 (3480)	24 (3480)		20 (2900)	24 (3480)
	Elongation	ASTM D638	%	600	600	600	700	700	700		600	700
	Hardness	ASTM D2240	Shore D	46	46	46	48	52	52		46	48
	Abrasion Resistance	ASTM D1044	mg	45	45	45	35	30	30		45	35
	Volume Resistivity	ASTM D257	ohm-cm	10 ¹⁷	10 ¹⁷	10 ¹⁷	10 ¹⁷	10 ¹⁸	10 ¹⁸		10 ¹⁷	10 ¹⁷
	Dielectric Voltage Brkdown	ASTM D149	kV/mm	27	20	20	27	20	20		20	27
Sleeve	Impact *	DIN 30 672	class C	--	pass	pass	pass	pass	pass		pass	pass
	Indentation *	DIN 30 672	class C	--	pass	pass	pass	pass	pass		pass	pass
	Peel	ASTM D1000	N/cm (pli)	15 (9)	55 (31)	79 (45)	80 (46)	80 (46)	115 (66)		50 (29)	120 (70)
	Peel	DIN 30 672	N/cm (pli)	8 (5)	50 (29)	70 (40)	65 (37)	65 (37)	90 (51)		35 (20)	86 (50)**
	Cathodic Disbondment	ASTM G8	mm rad	6	6	8	8	8	17		13	11
	Water Absorption	ASTM D570	%	0.05	0.05	0.05	0.05	0.05	0.05		0.05	0.05
	Low Temp. Flexibility	ASTM D2671C	°C (°F)	-40 (-40)	5 (23)	-20 (-4)	-14 (7)	-14 (7)	-15 (5)		-32 (-26)	-28 (-18)
	DIN Approval *	DIN 30 672	class	--	--	--	C30	C30	--		C50	C50
Fully Recovered T Sleeve Thickness		mm (mils)	← 2.5 (99) →			← 2.3 (90) →				← 3.3 (131) →		
Fully Recovered L Sleeve Thickness		mm (mils)	← 3.3 (131) →			← 2.8 (111) →				← 3.3 (131) →		

** backing elongation during peeling due to superior bond strength * Denotes L sleeve thickness

How To Order:

Dimensions & Ordering Info	KLO 230-450 BK	Standard Ordering Options		Diagram
		Heavy Duty Thickness (L)	Regular Thickness (T)	
Colour		BK-Black, YE-Yellow, WW-Clear Closure		
Sleeve Width		300mm, 450mm, 600mm, 900mm (12", 18", 24", 36")		
Pipe Size		55 - 1520mm (2" - 60")	55 - 500mm (2" - 20")	
Adhesive (thickness as supplied)		1.7 mm (65 mils) ¹	1.25 mm (50 mils) ¹	
Backing (thickness as supplied)		L - 0.9 mm (36 mils)	T - 0.6 mm (25 mils)	
Configuration		K - Wrapid Sleeve		
		Min. Sleeve Width = Bare Steel Dimension + 50 mm (2") min. on each side of the pipe joint.		

¹ NN has an adhesive thickness of 1.1mm (45 mils)

The above represents standard ordering options. Consult your Canusa representative for any unique project requirements.

² KLON, KTON, KTNN & KLNN are available in black only.



A SHAWCOR COMPANY

www.canusacps.com

Canada
CANUSA-CPS
a division of SHAWCOR LTD.
25 Bethridge Road
Rexdale, Ontario
M9W 1M7,
Canada
Tel: +1 (416) 743-7111
Fax: +1 (416) 743-5927

U.S.A./Latin America
CANUSA-CPS
a division of SHAWCOR INC.
2408 Timberloch Place
Building C-8
The Woodlands, Texas
77380, U.S.A.
Tel: +1 (281) 367-8866
Fax: +1 (281) 367-4304

Europe/Middle East
CANUSA-CPS
a division of Canusa Systems Ltd.
Darby House
Bletchingley Road
Merstham, Surrey
RH1 3DN, England
Tel: +44 (1737) 644014
Fax: +44 (1737) 645800

Asia/Pacific
CANUSA-CPS
a division of Shaw Pipeline
Services (Singapore) PTE Ltd.
896 Dunearn Road #04-04A
Sime Darby Centre
589472, Singapore
Tel: +65-469-9866
Fax: +65-469-2632